




300 HP Fourstroke

POA

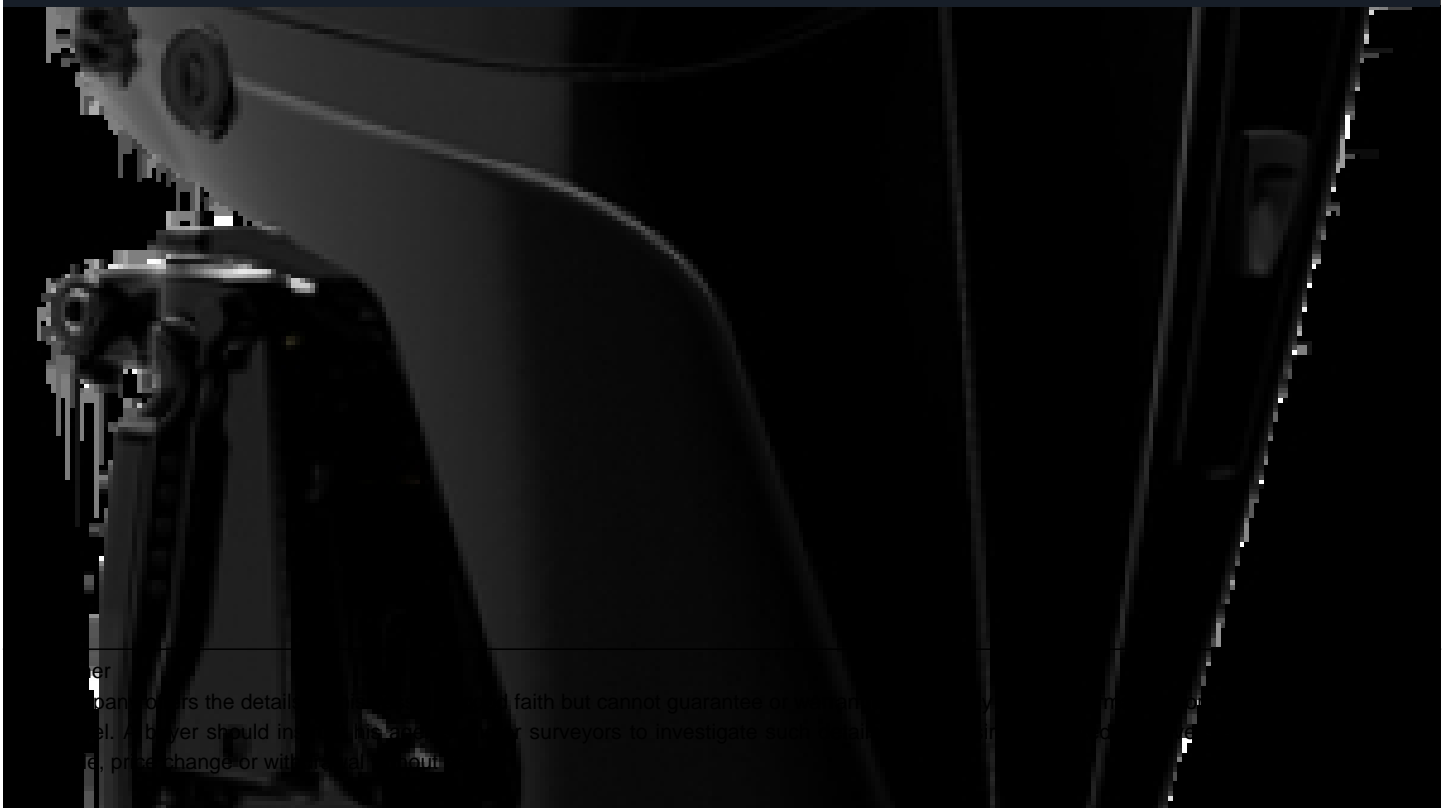

Specifications

Boat Details

| | | | |
|------------|---------|--------------|----------------------------|
| Price | POA | Boat Brand | Mercury |
| Model | 300 HP | Length | 0.00 |
| Year | 2021 | Category | Boat Engines and Outboards |
| Hull Style | | Hull Type | |
| Power Type | | Stock Number | 0 |
| Condition | New | State | New South Wales |
| Suburb | ROZELLE | Engine Make | Mercury |

Description

The new Mercury 300hp FourStroke is precision engineered from skeg to cowl. Packed with advanced technology to improve all aspects of performance and reliability. the Robust 4.6 Litre V-8 engine is designed to minimise weight and maximise fuel economy. Delivering Mercury's best ever FourStroke hole shot, top speed and fuel efficiency. The 300hp FourStroke now comes with a 3+3=6 Year factory warranty. ENGINE DETAILS

These robust motors deliver Mercury's best-ever FourStroke hole shot, top speed and fuel efficiency. Great for aluminum fishing, deck, inflatable rigid hull, inshore fishing, offshore fishing and runabouts and tritoons.

SPECIFICATIONS - 300

HP / kW

- 300 / 224

Engine type

- V-8

MidSection

- Conventional MidSection

Displacement (CID/CC)

- 279 CID

Displacement (L)

- 4.6L

Cylinder Configuration

- V-8 [64 degree] with Dual Overhead Cam [DOHC] and 32-valves

Full throttle RPM

- 5200-6000

Air induction

- Performance-Tuned Long-Runner Intake Manifold

Fuel induction system

Disclaimer

Our company offers the details of this vessel in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. A buyer should instruct his agents and/or surveyors to investigate such details buyer desires validated. This vessel is offered subject to prior sale, price change or withdrawal without notice.

-
- Electronic Fuel Injection (EFI) Computer Controlled with Advanced Range Optimization

Alternator amp / Watt

- 85-amp (1071 Watt) with Idle Charge

Recommended fuel

- Unleaded Regular 87 Octane Minimum (R+M/2) or 90 RON 10% Ethanol Maximum

Recommended oil

- NMMA Certified FCW SAE 10W-30

Engine protection operator warning system

- SmartCraft Engine Guardian

Compatible with SmartCraft digital technology

- Yes

Starting

- Electric Start with SmartStart Protection

Controls

- Remote Mechanical or Digital Throttle & Shift (DTS)

Steering

- Hydraulic (standard)
- Power (optional)

Shaft length

- 20" / 508 mm
- 25" / 635 mm

Gearcase ratio

- 1.75:1

Dry weight *Lightest model available

- 527 lbs / 239 kgs

CARB star rating

- 3

Bore and stroke

- 3.6 in x 3.4 in / 92 mm x 86 mm

Ignition

- SmartCraft PCM 112 Digital Inductive

Cooling system

- Water-cooled with thermostat

Disclaimer

Our company offers the details of this vessel in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. A buyer should instruct his agents and/or surveyors to investigate such details buyer desires validated. This vessel is offered subject to prior sale, price change or withdrawal without notice.

Gear shift

- F-N-R

Gearcase options

- 5.44"

Trim system

- Power trim and tilt

Exhaust system

- Through prop

Counter Rotation

- Available

Color

- Cold Fusion White
- Pearl Fusion White
- Phantom Black
- Warm Fusion White

Lubrication system

- Integrated wet sump

Oil Capacity

- 7.0 Quarts / 6.6 Liters

Maximum Trim Range

- 20° (-6° to 14°)

Maximum Tilt Range

- 73° (-6° to 67°)

Engine Details

Engine Make

Mercury

Displacement

4.6

Horse Power

300

Fuel Type

Unleaded Regular 87 Octane Minimum (R+M/2) or 90 RON 10% Ethanol Maximum

Steering

Hydraulic (standard) Power (optional)

Disclaimer

Our company offers the details of this vessel in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. A buyer should instruct his agents and/or surveyors to investigate such details buyer desires validated. This vessel is offered subject to prior sale, price change or withdrawal without notice.